


- **Ultra-Low-Power CO₂ sensor with Power Cycling**
- **Zero power consumption when not taking measurements**
- **Ideal for battery-powered operation**
- **Fit and forget, fully autonomous operation**
- **Long life, >15 years**

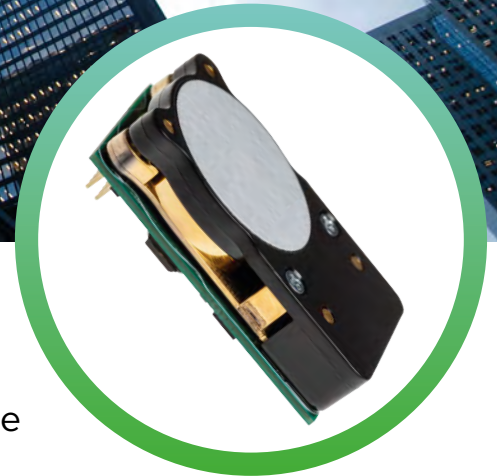

About the CozIR®-Blink

The CozIR®-Blink is an ultra-low power NDIR CO₂ sensor using state-of-the-art solid-state LED optical technology. The low-power LEDs are manufactured in-house, giving GSS complete control of the CO₂ sensor signal chain.

The CozIR®-Blink uniquely allows users to reduce the power consumption of CO₂ measurements to unprecedented levels. The CO₂ sensor can be power-cycled, allowing the user to wake-up the unit from a dormant state, take a reading, and then power it down completely again, reducing power consumption to zero. The power cycling function is particularly valuable in battery-powered or wirelessly connected interface applications where power is at a premium.

The CozIR®-Blink also features a built-in auto-calibration function that maintains CO₂ measurement accuracy over the lifetime of the product.

Features

- Ultra-low power CO₂ sensor
- 30ppm (typ.) measurement accuracy
- Solid state LED optical technology
- UART or I²C control and data interface
- Power cycling compatible
- Built-in auto-calibration
- California Building Standards Code, Title 24 compliant

Applications

- Indoor Air Quality (IAQ)
- IoT and Smart Technology with wireless connectivity
- Demand-Controlled Ventilation (DCV) systems
- Building Management Systems (BMS)
- Air Quality and HVAC Systems

Ordering Information

COZIR-BLINK - X

x	Measurement Range
2000	0-2000ppm
5000	0-5000ppm
1	0-1%

www.sstsensing.com/product/cozir-blink-miniature-co2-sensor/



CO₂ Sensor Specifications

Measurement Ranges	0-2000ppm, 0-5000ppm, 0- 10000ppm (0-1%)
Accuracy (typ.)	±(30ppm +3% of reading)
Time to 1st Reading	<3.5 seconds
Response Time	<30 Seconds (Diffusion limited)
Sample Method	Solid-state LED NDIR Diffusion

Electrical and Mechanical Specifications

Measurement Output	UART or I ² C
Supply Voltage	3.25V - 5.5V
Power Consumption (typ.)	<500μW @ 3.3V
Dimensions and Weight	31mm x 19.5mm x 8.7mm, 2.5g

Operating Conditions

Operating Conditions - Temperature	0°C to 50°C
Operating Conditions - Humidity	0-95% RH, non-condensing
Storage Conditions - Temperature	-30°C to +70°C
Pressure Dependence	500mbar - 1500mbar
Sensor Lifetime	>15 years
Environmental Compliance	RoHS and REACH